

At Signosaur, we're proud users of Avery Dennison and ImagePerfect™. If your order uses Self-Adhesive Vinyl (SAV), please refer to this document for the material's lifespan guidelines.

Please note, these are guidelines only, and are not a rule. Every effort has been given to ensure your order has a long product life.


**EXPECTED DURABILITY**

The expected durability is the expected period of time defined in this document. The product should, but is not warranted to, perform satisfactorily when applied in vertical exposure conditions as defined below.

The actual durability will depend on a variety of factors, including environmental conditions and cleaning/maintenance of the SAV. In case of SAV used in areas of high temperatures or humidity, high altitudes and industrially polluted areas, the performance will be further reduced.


**ANGLE AND DIRECTION OF EXPOSURE**

**Vertical exposure**




The face of the graphic is up to 10° from vertical.

**Non-vertical exposure**



The face of the graphic is between 10° to 45° from vertical. The durability as stated in this document is reduced by 50% for non-vertical applications.

**Horizontal exposure**

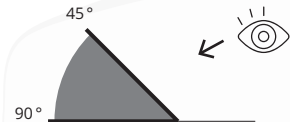

The face of the graphic is between 45° and 90° from vertical. Horizontal applications are not warranted and do not have any expectations of durability.

**AUSTRALIAN ZONES**

**Zone 1**

Tasmania

**Zone 2**

Adelaide  
Albany  
Brisbane\*

Canberra  
Coffs Harbour  
Esperance


Melbourne  
Perth\*  
Sydney

**Zone 3**

Alice Springs  
Broken Hill  
Broome  
Cairns  
Carnarvon  
Ceduna

Cook  
Darwin  
Dubbo  
Geraldton  
Kalgoorlie  
Mackay

Mount Isa  
Newman  
Port Augusta  
Port Hedland  
Telfer  
Townsville

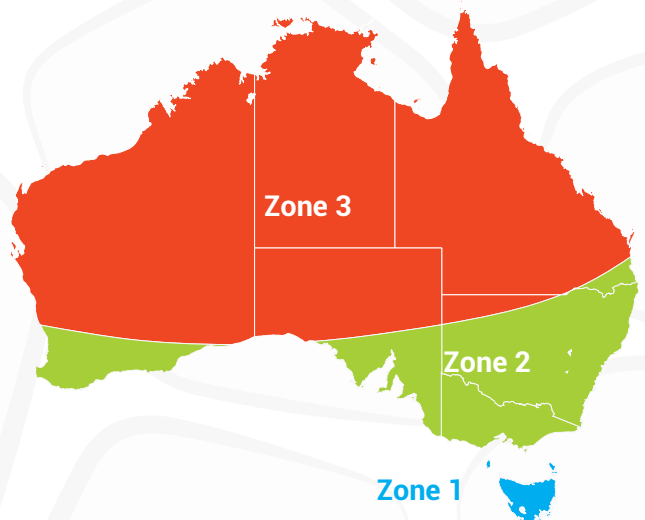

\*All areas 100KM north of Perth and Brisbane, indicated by line dissecting map illustration of Australia. All locations mentioned in zones 1 and 2 when installed above altitudes of 1000 metres are considered Zone 3.

		Zone Lifespan Guideline (Years)		
Avery Dennison		Z-1	Z-2	Z-3
MPI 2050	White Translucent	7	4.9	2.9
BACKLIT SAV				
MPI 1105	Easy Apply RS	7	4.9	2.9
PREMIUM POLYMERIC SAV				
DOL1460Z	Hi GL Super Conf	7	4.9	2.9
LAMINATE				

		Zone Lifespan Guideline (Years)		
ImagePerfect™		Z-1	Z-2	Z-3
IP2592PA	Apollo Gloss Wht GP	5	3.5	2.1
STANDARD POLYMERIC SAV				